

FRAMELESS GLASS
SLIDING DOORS

- 1/2" or 3/8" clear tempered glass
- 34-36 STC for glass only
- Standard acoustic package includes multiple seals at track/fascia, receiver, and F18
- Standard soft close/open
- Available with ladder pulls, locking or non-locking
- Engineered to order domestically with a 4-6 week lead time



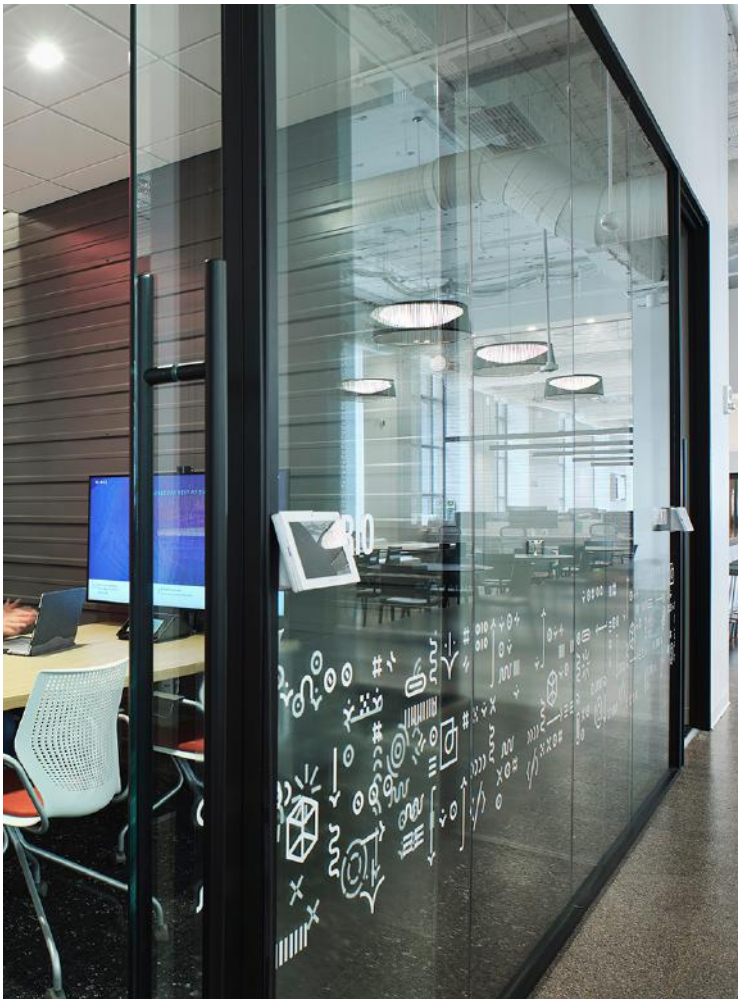

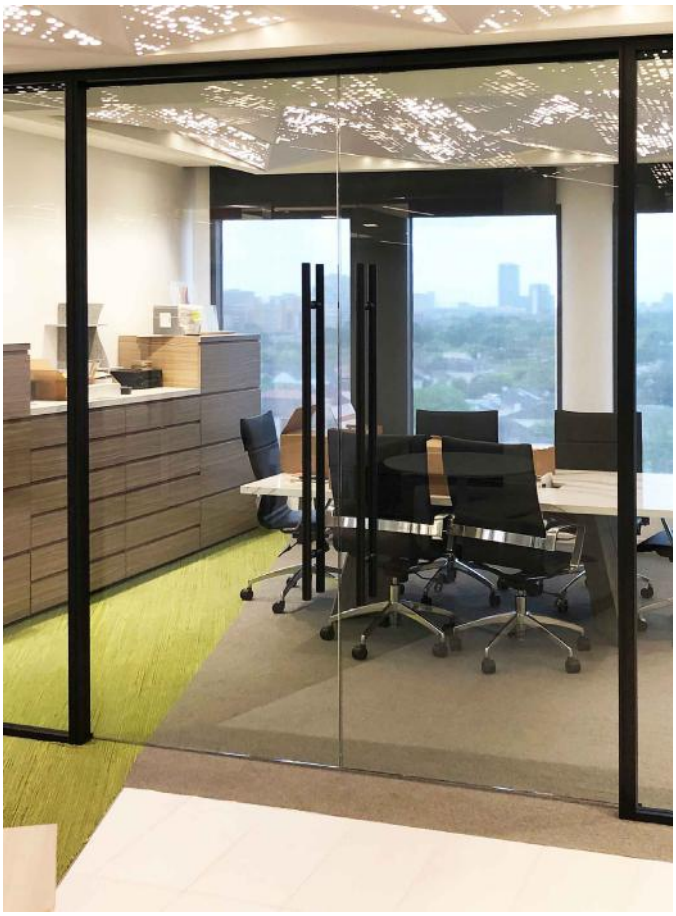

© 2022 INFINIUM Wall Systems, Inc. All Rights Reserved.

STANDARD HARDWARE

FRAMELESS GLASS SLIDING DOORS

© 2022 INFINIUM Wall Systems, Inc. All Rights Reserved.

DOOR HARDWARE OPTIONS

CUSTOM HARDWARE SOLUTIONS


+ INFINIUM has a wide array of beautiful door hardware options that work with any of our wall systems. In addition to our standard offerings, we work with all major hardware manufacturers to provide you with an unlimited selection to fit your project needs. No matter what your requirements may be, our in-house team of engineers and project managers will work together to provide a custom hardware solution that's right for you.

STANDARD HARDWARE PACKAGE


INFINIUM PROPRIETARY SLIDING HARDWARE

+ Standard soft-open, soft-close.
+ Fitting set for single 220 lb. top hung sliding glass door with upper track.
+ Combi running track, wall or ceiling mounting, installation height 60 mm.
+ Design aluminium panels for running track.



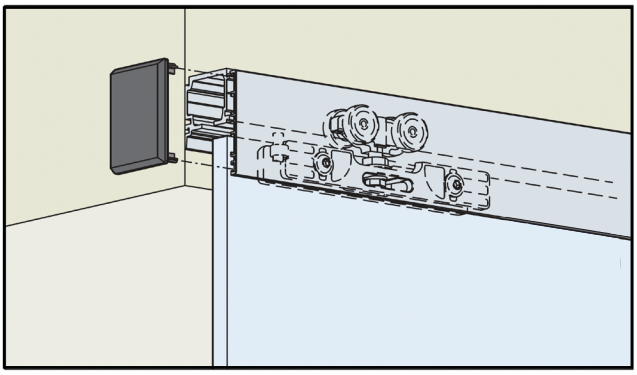



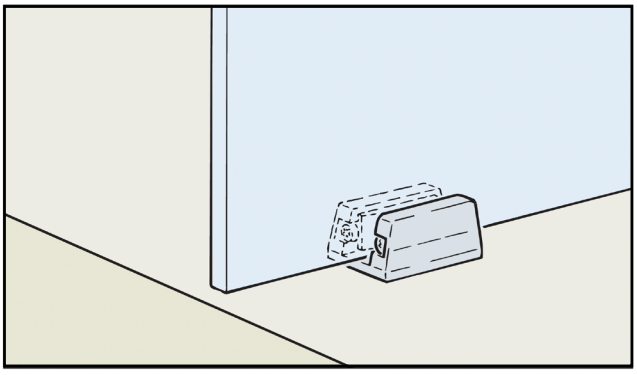

STANDARD HARDWARE


FRAMELESS GLASS SLIDING DOORS

© 2022 INFINIUM Wall Systems, Inc. All Rights Reserved.

LADDER PULLS

DPA 4000 NON-LOCKING LADDER PULL

+ With advance notification, the capability to swap non-locking with locking pulls can be achieved Day 2 utilizing non-locking pulls that accommodate the same size insert requirements for pull mounts on glass.

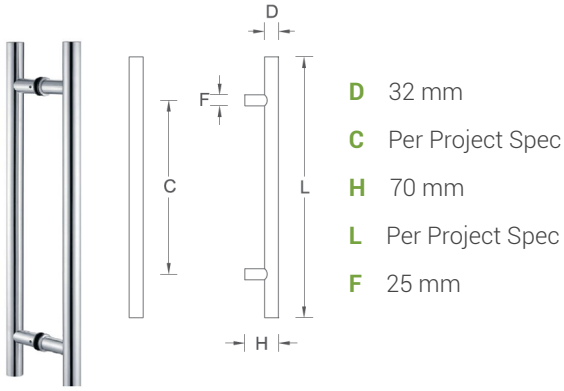


D 32 mm
C Per Project Spec
H 70 mm
L Per Project Spec
F 25 mm

LDPA LOCKING LADDER PULL

+ Heavy duty stainless steel construction
+ Key-operated from exterior; turnknob from interior
+ Accomodates door thickness 8-19mm range
+ 16mm steel deadbolt with 32mm throw
+ Floor locking standard, head and dual locking available
+ Bolt location: 64mm from face of door to centerline of bolt
+ Available in SFIC, side-bitted, or standard SC cylinder options



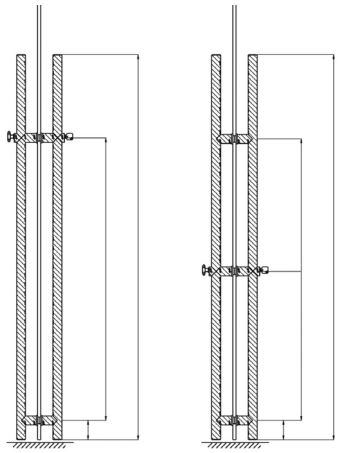

Item	B	A
LDP1–1200	925mm	1200mm
LDP1–1500	1250mm	1500mm

Item	C	B	A
LDP1–1800	925mm	725mm	1800mm
LDP1–2000	925mm	925mm	2000mm
LDP1–2400	1175mm	1075mm	2400mm

LDP1A13 (ADA)

